

SCMH1200

12 Channel DINrail Mount Digital Dimming Controller

Key Features

- 12 channel device
- Broadcast DALI, DSI or 1-10V control
- 128 scene memory
- Connects to the iLight network via screw terminals
- Fail to full safety feature
- iLight iCANnet™ network inputs
- DALI in (12 address DALI end device)
- Future proof with FLASH memory
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards



Overview

This SCMH1200 is a DINrail mount 12 channel digital dimming controller. Each channel may be configured to provide Broadcast DALI, DSI or 1-10V control.

With iLight network connectivity, it has the capability of being linked with a virtually limitless number of other iLight products to build up to any size of system.

Mechanical Data

Weight: 0.35kg

Operating temperature: +2°C to +50°C

Note: All enclosures must be adequately ventilated

Max storage temperature: +60°C

Humidity: +5 to 95% non-condensing


Environmental protection: IP20

Installation: Installation must be carried out by a suitably qualified electrician and installed in a suitable DINrail enclosure.

Software

For programming SCH1200, Device Editor V2.11.1 or later is required (Packaged with iCANsoft V3.1.7 or later)

Dimensions

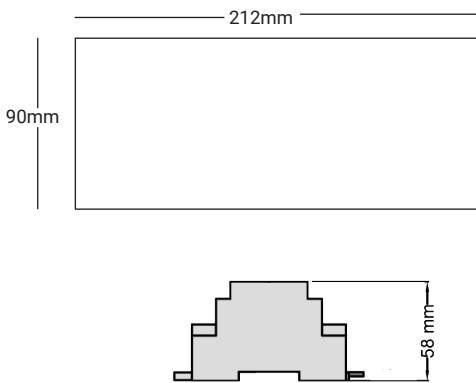

Electrical Data

Control: Via iLight network connection or DALI

Integral iLight Network Power Supply: 15V 500mA

Maximum Load: There is no load control. Power switching is achieved by the DSI / DALI ballasts themselves.

Supply: 1 x 230 volts +/- 10% 50/60 Hz

Supported Load Types:

DALI (Broadcast), source, 100 mA per channel

DSI, source, 100 mA per channel

0-10V, source, 50 mA per channel

1-10V, sink, 50 mA per channel

Recommended quantities of drivers/ballasts:

Maximum of 50 per channel

Maximum of 500 per SCM1200 unit

Switched Relay Outputs: None

Use: SCMH0410 for relays and low voltage control, SCMR1232 and SCMR0432 for feed through (latching) relays, SCMC0410 for change over relays and low voltage control.

Terminal Sizes:

Incoming supply, max' cable size: 2.5mm²

Ballast output, max' cable size: 2.5mm² per terminal

iCAN network cable type: Belden 1502 or equivalent


Memory:

FLASH memory to be able to upgrade firmware

EEPROM for 128 scene memory

Fade Times: 0.1 seconds to 60 minutes

Typical Schematic

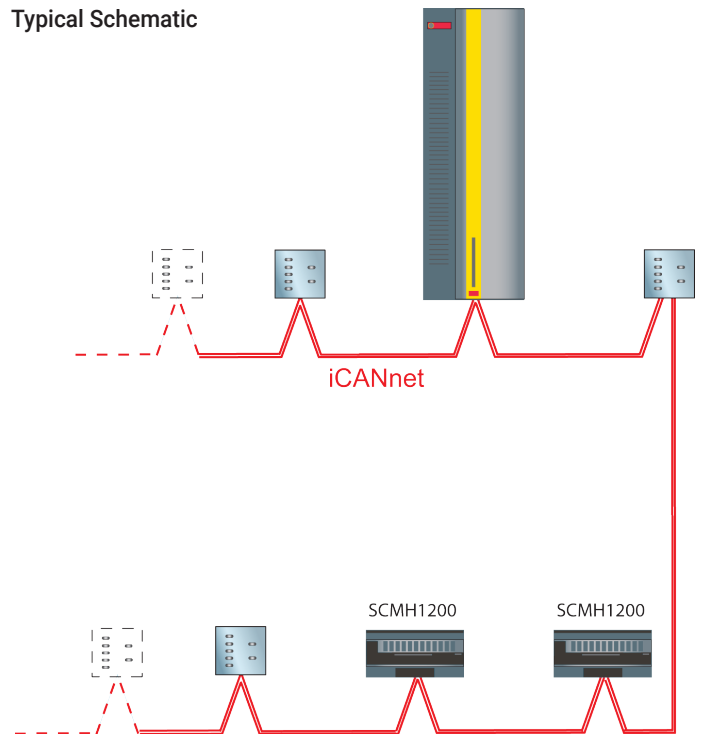

Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

Cooper Lighting Solutions
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

iLight is a registered trademark.

All other trademarks are property of their respective owners.

© 2020 Cooper Lighting Solutions
All Rights Reserved

SCMH1200 Rev11 0720